

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

PRODUCT DESCRIPTION

J3IC-LED-NB is designed for new construction installations and suitable for use in ceiling where the housing can be direct contact with insulation. Air tight construction reduces energy costs by reducing the amount of air leakages through the ceiling.

PRODUCT SPECIFICATIONS

Plaster Frame

- Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

Junction Box

- Listed for through branch circuit wiring.
- Contains one 1-1/8", six 7/8" knockouts and four Romex pryouts with strain relief.

Bar Hanger


- Pre-installed Real nail easily installs in regular lumber, engineered lumber.
- Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

Listings



- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

J3IC-LED-NB

3" IC LED Dedicated Can New construction Housing

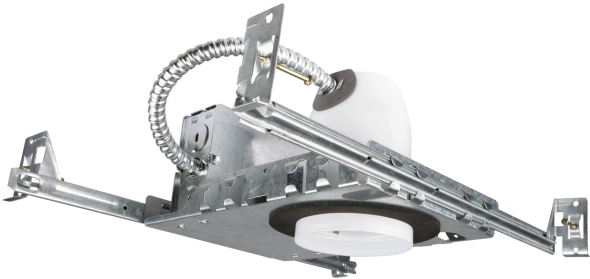

DIMENSIONS

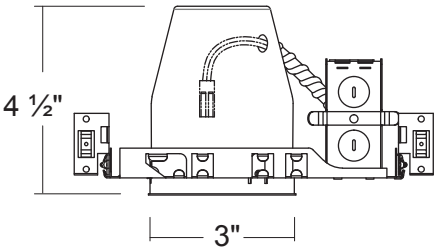

COMPATIBLE PRODUCTS

Catalog Number	Description
JRT-3	3" LED Retrofit / Round Smooth
JRT-SQ	3" LED Retrofit / Square Baffle
JRT-ADJ	3" LED Retrofit / Adjustable