

Project:

Fixture Type:

Location:

Contact/Phone:

JML-303-120V

120V LED Puck Light


DESCRIPTION

Feature

- 3 LED puck light kit.
- Easy to install surface mount or recess mount.
- Linkable and dimmable.
- Lens cover is UV filter.
- Cool to touch.




DIMENSION

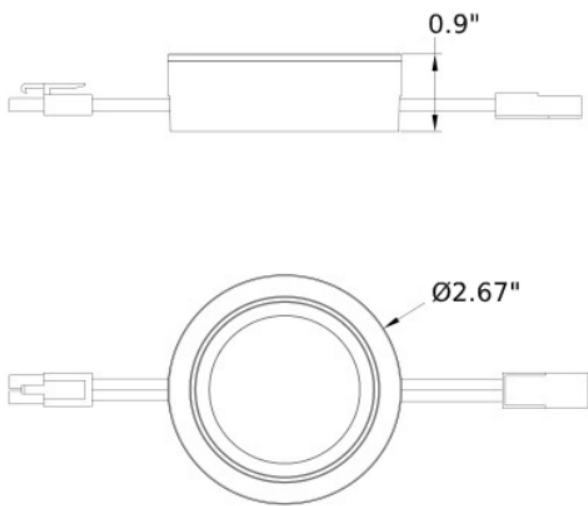

PERFORMANCE DATA

Model No.	Voltage	CCT	Wattage	Lumen	Finish	Dimensions	Frequency
JML-303-120V-BK-3K	120V	3000 K	4W	275	Black	Ø2.67" x 0.9"	50/60 Hz
JML-303-120V-BK-5K	120V	5000 K	4W	275	Black	Ø2.67" x 0.9"	50/60 Hz
JML-303-120V-WH-3K	120V	3000 K	4W	275	White	Ø2.67" x 0.9"	50/60 Hz
JML-303-120V-WH-5K	120V	5000 K	4W	275	White	Ø2.67" x 0.9"	50/60 Hz

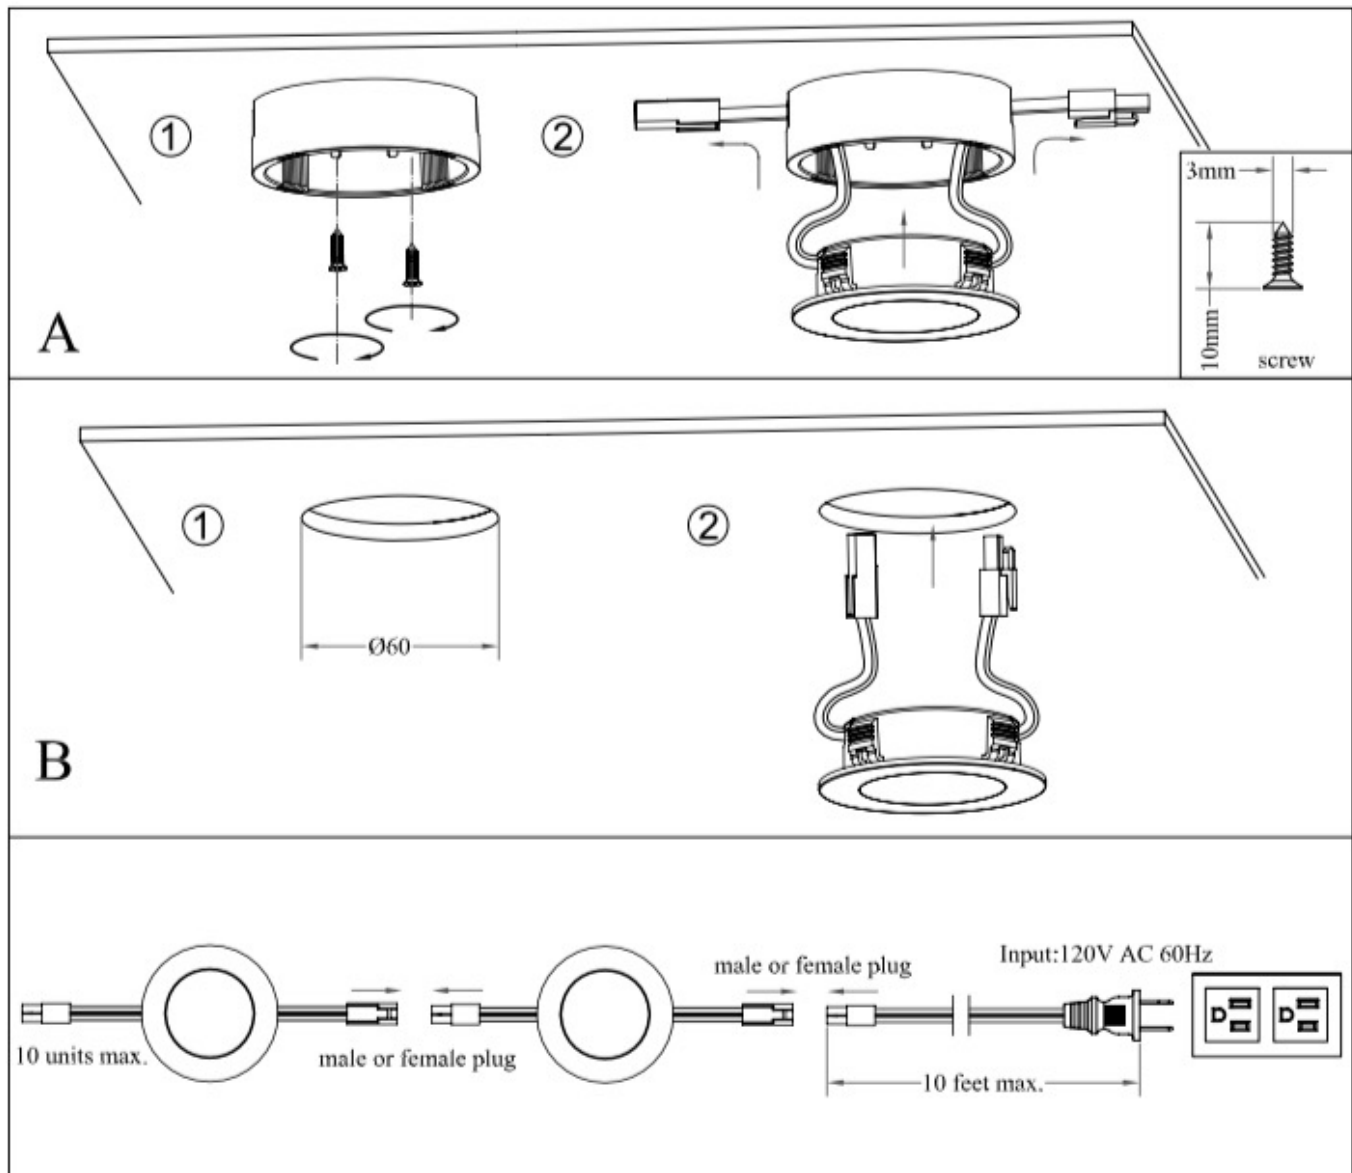

## CAUTION:

To reduce the risk of fire, electric shock, or injury to persons:

1. Use only insulated staples or plastic ties to secure cords;
2. Route and secure cords so that they will not be pinched or damaged when the cabinet is pushed to the wall;
3. Position the portable cabinet light with respect to the cabinet so the lamp replacement markings are able to be read during relamping;
4. Not intended for recessed installation in ceilings, or soffits;
5. The National Electrical Code (NEC) does not permit cords to be Concealed where damage to insulation may go unnoticed.
6. To prevent fire danger, do not run cord behind walls, ceilings, soffits, or cabinets where it may be inaccessible for examination. Cords should be visually examined periodically and immediately replaced when any damage is noted;
7. This lamp is suitable for cabinets in a dry setting ;
8. Please use a matching plug system with lamp and power supply;
9. Direct connection with male and female plug and max. 10pcs allowed;
10. This is portable cabinet light, pls follow the instruction to mount the device. When the device provided with power supply cord less than 3m maximum distance from the device to the receptacle is determined by the length of cord provided.