

Project:

Fixture Type:

Location:

Contact/Phone:

The JRT2-4-3CCT-S-NE26 is 4 inch Economy version of LED Retrofit Kit with Smooth. This LED retrofit is CCT adjustable. It is compatible with most of 4 inch standard recessed new construction and remodel housings.

DESCRIPTION

- Conduit quick-connect connectors facilitate installation.
- Use select 3 kinds of CCT with a switch on the driver.
- Oversized trim ring constructed from one-piece stamped aluminum body.
- 3 Tension clips pre-installed on unit for easy installation.

LED LIGHT ENGINE

- Protected LED driver performs at 120V.
- Dimming down to 10% with most dimmers.
- Available in CCT 3000K, 4000K, and 5000K
- CRI ≥90
- Long life LED chips guaranteed up to 50,000 hours.

WARRANTY

Guaranteed five years from the purchase date of the product, against mechanical defects in manufacturing.

LISTINGS

- cULus classified
- Energy star qualified
- Title 24 compliant
- Wet locations (Not suitable for coastal/salt water area)
- Damp locations
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80

PERFORMANCE DATA

Input Voltage	120V		
Input Power	10W		
Frequency	50 / 60Hz		
C R I	90		
T Ambient	-30 °C ~40 °C (-22 °F ~104 °F)		
C C T	3000 K	4000 K	5000 K
Lumens	690 lm	770 lm	690 lm


(all values at 25°C without a dimming control in circuit)

JRT2-4-3CCT-S-NE26

4" LED Smooth Retrofit 3 CCT Kit



DIMENSIONS

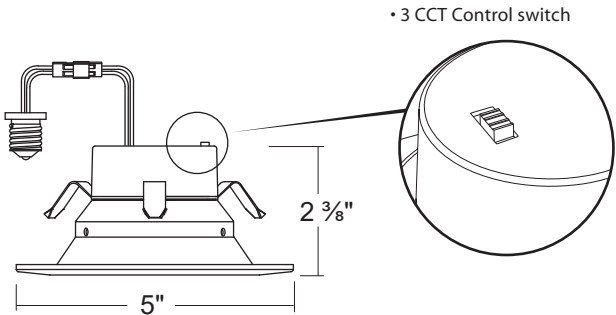

120V Dimmer List		
Mfr	Model #	Dimming Rate
COOPER	DLC03P	10 - 100%
Leviton	1A1505 / 1C1605	10 - 100%
Leviton	6631 / 6633	10 - 100%
Lutron	CT-603PG / CT-600PR	10 - 100%
Lutron	DV-600PR / DV603PG	10 - 100%
Lutron	DVW-603PGH / DVCL-153P	10 - 100%
Lutron	MACL-153M / TGCL-153P	10 - 100%
Lutron	S-600PR / S-2-LH	10 - 100%