JET LIGHTING®

Project:

Fixture Type:

Location:

Contact/Phone:

DESCRIPTION

Feature


- 3 LED puck light kit.
- Perfect for use in kitchen shelvings, cabinets, and displays.
- Metal Body.
- May be mounted recessed and surface.
- Includes driver.




JML-303-12V

12V LED Puck Light

DIMENSION








PERFORMANCE DATA

Model No.	Voltage	CCT	Wattage	Lumen	Finish	Dimensions
JML-303-12V-BK-3K	12V	3000 K	3W	220	Black	Ø2.44" x 0.5"
JML-303-12V-BK-4K	12V	4000 K	3W	250	Black	Ø2.44" x 0.5"
JML-303-12V-WH-3K	12V	3000 K	3W	220	White	Ø2.44" x 0.5"
JML-303-12V-WH-4K	12V	4000 K	3W	250	White	Ø2.44" x 0.5"

JET LIGHTING®

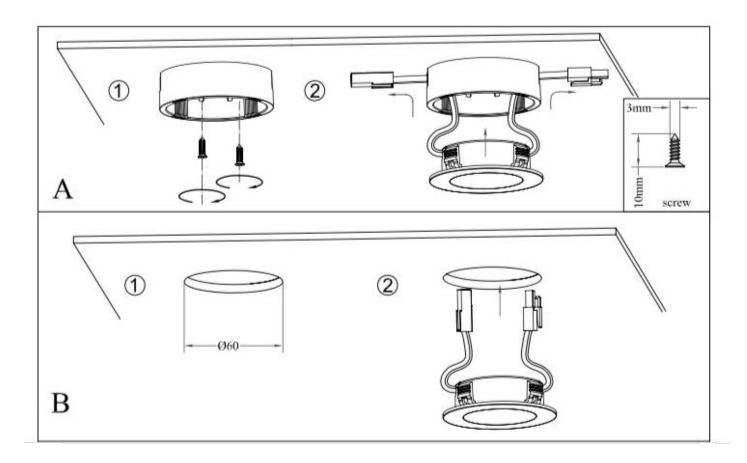

CAUTION:

To reduce the risk of fire, electric shock, or injury to persons:

- 1. Use only insulated staples or plastic ties to secure cords;
- 2. Route and secure cords so that they will not be pinched ora. damaged when the cabinet is pushed to the wall;
- 3.Position the portable cabinet light with respect to the cabinet so the lamp replacement markings are able to be read during relamping;
- 4. Not intended for recessed installation in ceilings, or soffits;
- 5. The National Electrical Code (NEC) does not permit cords to be Concealed where damage to insulation may go unnoticed.
- 6.To prevent fire danger, do not run cord behind walls, ceilings, soffits, or cabinets where it may be inaccessible for examination. Cords should be visually examined periodically and immediately replaced when any damage is noted;
- 7. This lamp is suitable for cabinets in a dry setting
- 8.Please use a matching plug system with lamp and power supply;
- 9. Direct connection with male and female plug and max. 10pcs allowed;
- 10. This is portable cabinet light, pls follow the instruction to mount the device. When the device provided with power supply cord less than 3m maximum distance from the device to the receptacle is determined by the length of cord provided.